

CONTINUOUS FLIGHT AUGER SYSTEMS

The N.U.B. Continuous Flight Auger offers a robust construction for continuous drilling with the emphasis very much on customers' specific requirements.

The double start digging head gives a stable entry & effective drilling method with single flight spoil carriage, fitted with either bottom exit or side exit. N.U.B. offer different coupling designs from 70mm A/F fully machined hex coupling to 250mm A/F fully machined hex coupling to cover the range of heavy duty drilling.



The flight pitches are set to give maximum carrying capacity with minimum spoil slippage.



Design subject to change without notice.
Tools also manufactured to customers specification.

Reference Number	C/D (mm)	P (mm)	L/T (mm)	T (mm)	L (mm)	T/D (mm)
HEAD300	300	400	40	20	1,1.5,3	140 x 20
HEAD350	350	400	40	20	1,1.5,3	140 x 20
HEAD400	400	500	40	20	1,1.5,3	140 x 20
HEAD450	450	500	40	20	1,1.5,3	140 x 20
HEAD500	500	500	40	20	1,1.5,3	140 x 20
HEAD550	550	600	40	20	1,1.5,3	140 x 20
HEAD600	600	600	40	20	1,1.5,3	140 x 20
HEAD750	750	600	40	20	1,1.5,3	140 x 20

Reference Number	F/D (mm)	P (mm)	T (mm)	L (m)	T/D (mm)
CFA300	300	300	20	3,6,7.5	140 x 20
CFA350	350	300	20	3,6,7.5	140 x 20
CFA400	400	400	20	3,6,7.5	140 x 20
CFA450	450	400	20	3,6,7.5	140 x 20
CFA500	500	400	20	3,6,7.5	140 x 20
CFA550	550	500	20	3,6,7.5	140 x 20
CFA600	600	500	20	3,6,7.5	140 x 20
CFA750	750	500	20	3,6,7.5	140 x 20

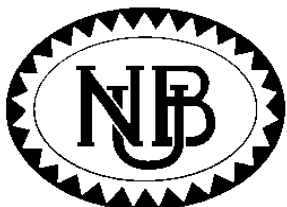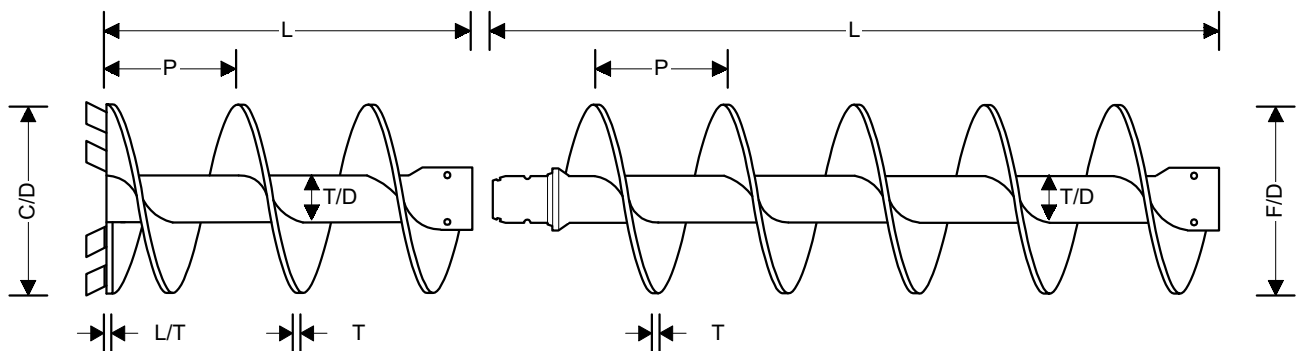

N.U.B. Engineering Limited

Mosshall Road, Newhouse Industrial Estate, Motherwell, ML1 5RX, Scotland.

Telephone: +44 (0) 1 698 833873

Facsimile: +44 (0) 1 698 734322