

HEXAGON CORE AUGERS


1. Augers supplied with hexagon centre tube.
2. Augers supplied with welded 1 1/8", 1 5/8" & 2" male & female hexagon connections, with female hex both ends & bolted in male one end.
4. Any length of auger can be supplied.
5. Optional hardfacing available.
6. Optional 2 1/4", 2 1/2" & 4" welded female hexagon connections, with female hex both ends & bolted in male one end.
7. Auger made to customer specification if required.




HEXAGON SIZE A/F	D (mm)	P (mm)	T (mm)	L (m)
1 1/8"	83	84	6	0.75, 1.0, 1.5, 3.0
	89	84	6	0.75, 1.0, 1.5, 3.0
	114	100	6	0.75, 1.0, 1.5, 3.0
	127	100	6	0.75, 1.0, 1.5, 3.0
	152	125	6	0.75, 1.0, 1.5, 3.0
1 5/8"	114	100	6	0.75, 1.0, 1.5, 3.0
	127	100	6	0.75, 1.0, 1.5, 3.0
	152	125	6	0.75, 1.0, 1.5, 3.0
	178	125	6	0.75, 1.0, 1.5, 3.0
	203	180	8	0.75, 1.0, 1.5, 3.0
2"	254	200	8	0.75, 1.0, 1.5, 3.0
	305	250	8	0.75, 1.0, 1.5, 3.0
	150	125	8	0.75, 1.0, 1.5, 3.0
	180	150	8	0.75, 1.0, 1.5, 3.0
	200	180	8	0.75, 1.0, 1.5, 3.0
	225	200	10	0.75, 1.0, 1.5, 3.0
	250	200	10	0.75, 1.0, 1.5, 3.0
	300	250	10	0.75, 1.0, 1.5, 3.0



Screw Bit




Drive Pin





Drivlug

Female Coupling Connection



Male Coupling Connection

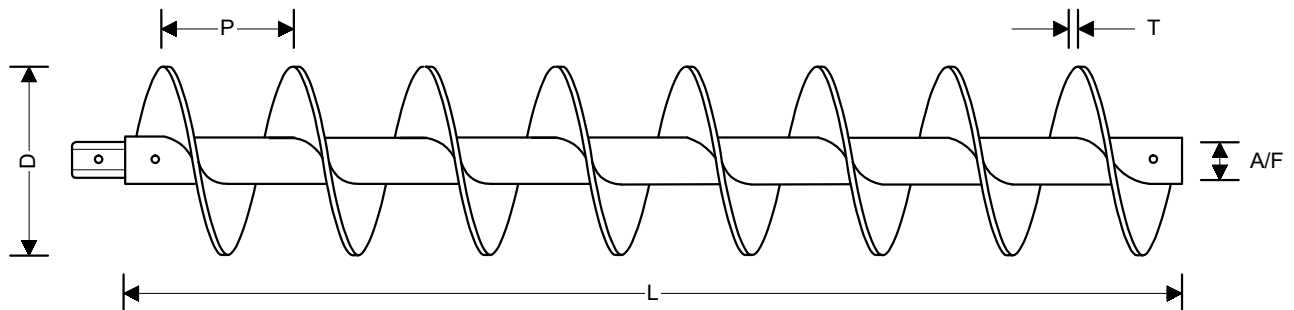

N.U.B. Engineering Limited

Mosshall Road, Newhouse Industrial Estate, Motherwell, ML1 5RX, Scotland.

Telephone: +44 (0) 1 698 833873

Facsimile: +44 (0) 1 698 734322